




Samsung SCH-3500 Back Cover Replacement

Back cover installation requires the use of T6 Torx screwdriver and some manual dexterity.

Written By: Brett Tomashitis

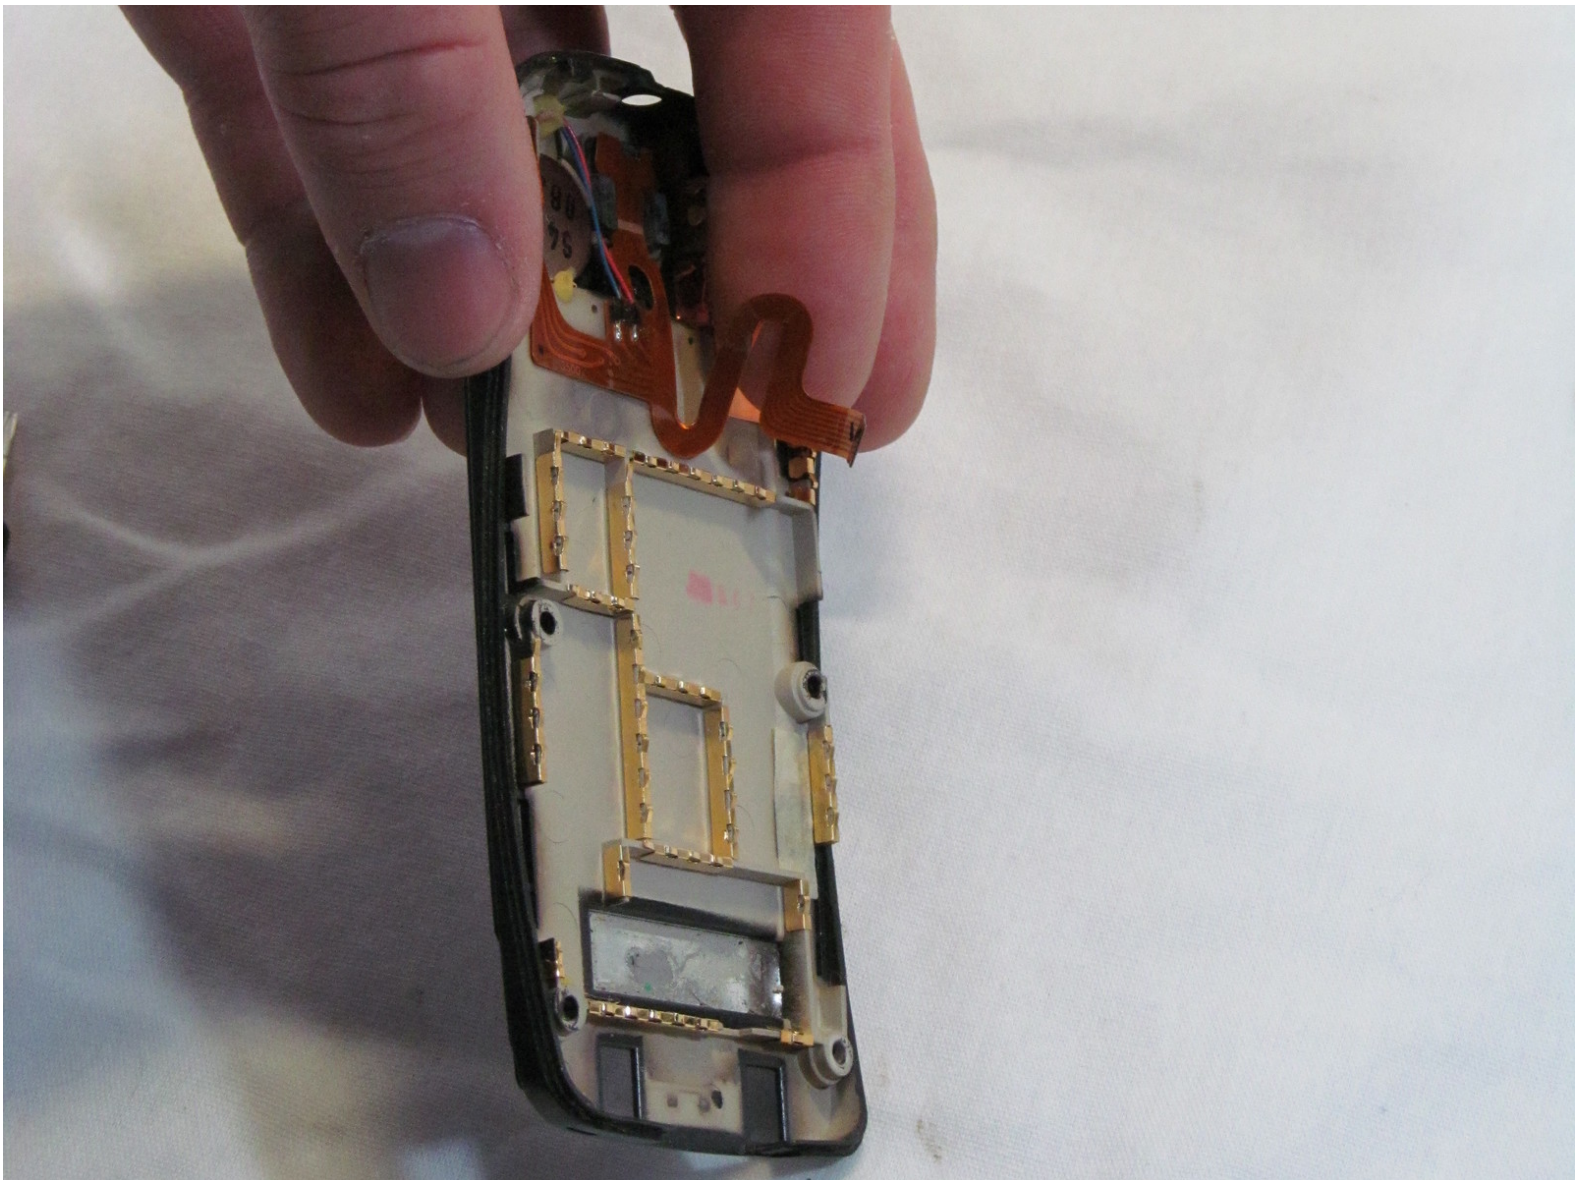



TOOLS:

- [T6 Torx Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Battery



- Turn Samsung SCH3500 around so that the back is facing you. Depress locking tab on the back of the phone with a finger or thumb.

Step 2



- Slide battery toward bottom of the phone, ~1/4 inch, to clear the hooks that keep it secured to the back of the phone.

Step 3



- Lift battery away from phone case.
- The battery is now removed from the device. Congratulations.

Step 4 — Antenna



- Grasp antenna firmly and rotate counterclockwise to unscrew it from the phone.

Step 5



- When unscrewed, pull the antenna straight up and out.

Step 6



- Pull guide tube free from its retaining ring and slide it out the top, like the antenna (optional).
- The antenna and its guide tube are now removed from the phone. Congratulations.

Step 7 — Back Cover



- Remove the four screws using a T6 Torx screwdriver.


Step 8



- Work from the bottom of the phone, separating the two halves of the case.

i Note: Take care to keep the logic board with the front case half. Part of the logic board is exposed to the sticker under the battery on the rear case half.




Step 9

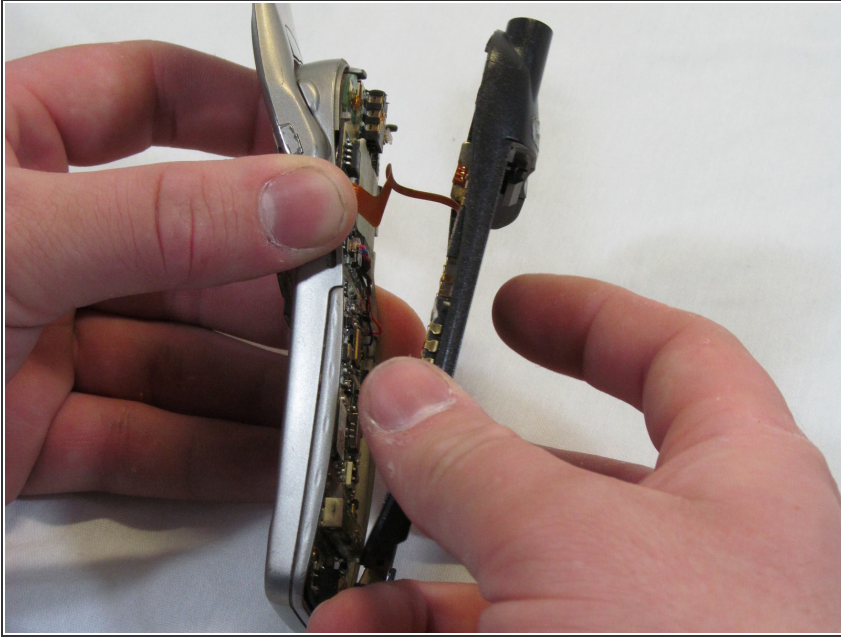

- Angle the rear case half away from the top of the front case half, pivoting the hooks out of their clasps.

⚠ Caution: Do not fully separate the halves. There is an antenna ribbon connected to the logic board from the back cover.

Step 10

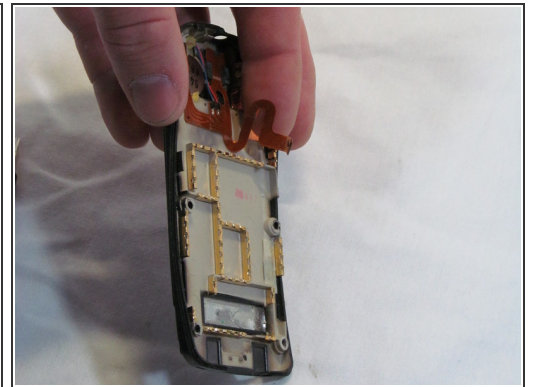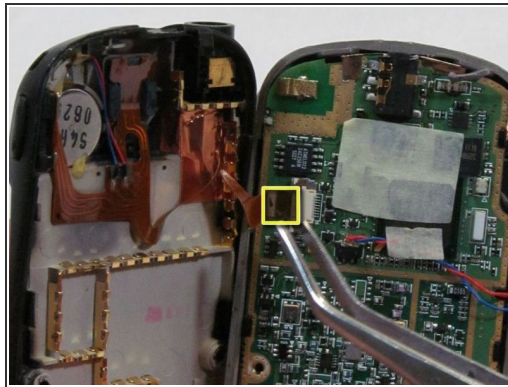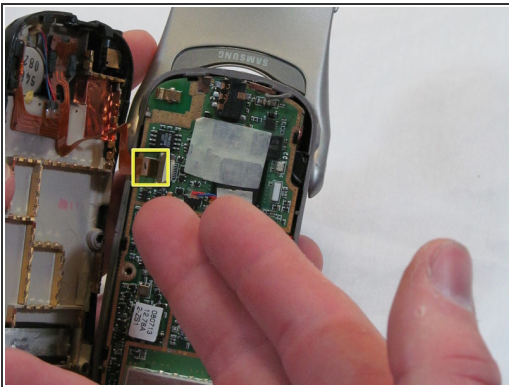

- Disconnect the antenna ribbon cable from the logic board at the Zero Insertion Force (ZIF) connector. The brown portion of the connector lifts up to release the cable end.
- The Back Cover is now removed. Congratulations.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-23 10:10:47 PM.